

Rotec Bridas ciegas

Resina Derakane 411 (o equivalente)

Drilling Standard: JIS B2220 20K



#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	150	20	305	260	12	25	30	BFS-150-20/20K
2	150	25	305	260	12	25	35	BFS-150-25/20K
3	200	20	380	305	12	25	40	BFS-200-20/20K
4	200	25	380	305	12	25	44	BFS-200-25/20K
5	250	20	430	380	12	27	44	BFS-250-20/20K
6	250	25	430	380	12	27	52	BFS-250-25/20K
7	300	20	490	430	16	27	52	BFS-300-20/20K
8	300	25	490	430	16	27	60	BFS-300-25/20K
9	350	20	540	480	16	33	60	BFS-350-20/20K
10	350	25	540	480	16	33	68	BFS-350-25/20K
11	400	20	600	540	16	33	68	BFS-400-20/20K
12	450	20	710	605	20	33	74	BFS-450-20/20K
13	450	25	710	605	20	33	85	BFS-450-25/20K
14	500	20	735	660	20	33	80	BFS-500-20/20K
15	500	25	735	660	20	33	90	BFS-500-25/20K
16	600	20	850	770	24	39	95	BFS-600-20/20K


Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

Rotec Bridas ciegas

Resina Derakane 411 (o equivalente)

Drilling Standard: JIS B2220 20K

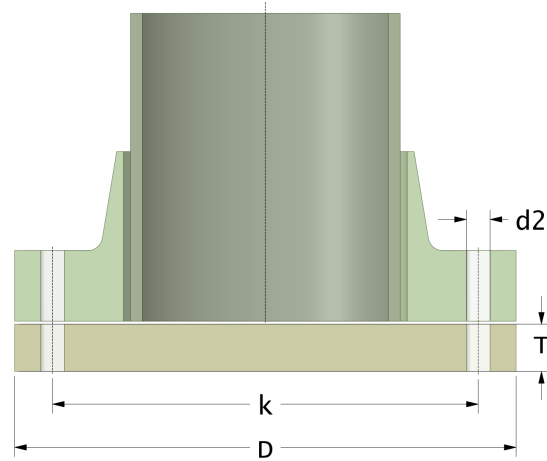

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	700	20	1035	900	24	48	110	BFS-700-20/20K
18	700	25	1035	900	24	48	120	BFS-700-25/20K
19	800	20	1150	1030	24	56	125	BFS-800-20/20K
20	800	25	1150	1030	24	56	140	BFS-800-25/20K
21	900	20	1270	1140	28	56	135	BFS-900-20/20K
22	900	25	1270	1140	28	56	155	BFS-900-25/20K

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

08-02-2024