

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table D




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	150	10	285	235	8	18	22	BFS-150-10/AS-D
2	150	16	285	235	8	18	28	BFS-150-16/AS-D
3	200	10	350	292	8	18	25	BFS-200-10/AS-D
4	200	16	350	292	8	18	35	BFS-200-16/AS-D
5	250	10	410	356	8	22	35	BFS-250-10/AS-D
6	250	16	410	356	8	22	40	BFS-250-16/AS-D
7	300	10	460	406	12	22	40	BFS-300-10/AS-D
8	300	16	460	406	12	22	48	BFS-300-16/AS-D
9	350	10	540	470	12	26	44	BFS-350-10/AS-D
10	350	16	540	470	12	26	52	BFS-350-16/AS-D
11	400	10	600	521	12	26	48	BFS-400-10/AS-D
12	400	16	600	521	12	26	60	BFS-400-16/AS-D
13	450	10	644	584	12	26	52	BFS-450-10/AS-D
14	450	16	644	584	12	26	68	BFS-450-16/AS-D
15	500	3	720	641	16	26	35	BFS-500-03/AS-D
16	500	6	720	641	16	26	44	BFS-500-06/AS-D

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table D




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	500	10	720	641	16	26	60	BFS-500-10/AS-D
18	500	16	720	641	16	26	74	BFS-500-16/AS-D
19	550	3	775	699	16	30	40	BFS-550-03/AS-D
20	550	6	775	699	16	30	52	BFS-550-06/AS-D
21	550	10	775	699	16	30	64	BFS-550-10/AS-D
22	550	16	775	699	16	30	80	BFS-550-16/AS-D
23	600	3	844	756	16	30	44	BFS-600-03/AS-D
24	600	6	844	756	16	30	52	BFS-600-06/AS-D
25	600	10	844	756	16	30	68	BFS-600-10/AS-D
26	600	16	844	756	16	30	85	BFS-600-16/AS-D
27	700	3	910	845	20	30	48	BFS-700-03/AS-D
28	700	6	910	845	20	30	60	BFS-700-06/AS-D
29	700	10	910	845	20	30	74	BFS-700-10/AS-D
30	700	16	910	845	20	30	92	BFS-700-16/AS-D
31	800	3	1085	984	20	36	60	BFS-800-03/AS-D
32	800	6	1085	984	20	36	68	BFS-800-06/AS-D
33	800	10	1085	984	20	36	85	BFS-800-10/AS-D

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table D

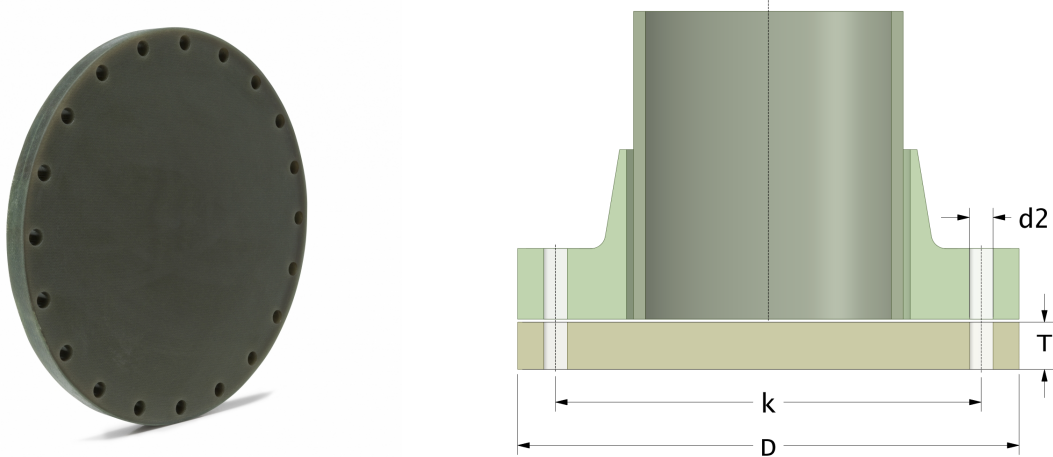

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	800	16	1085	984	20	36	105	BFS-800-16/AS-D
35	900	3	1190	1092	24	36	60	BFS-900-03/AS-D
36	900	6	1190	1092	24	36	78	BFS-900-06/AS-D
37	900	10	1190	1092	24	36	95	BFS-900-10/AS-D
38	900	16	1190	1092	24	36	115	BFS-900-16/AS-D
39	1000	3	1265	1175	24	36	68	BFS-1000-03/AS-D
40	1000	6	1265	1175	24	36	85	BFS-1000-06/AS-D
41	1000	10	1265	1175	24	36	105	BFS-1000-10/AS-D
42	1000	16	1265	1175	24	36	130	BFS-1000-16/AS-D
43	1200	3	1540	1410	32	36	80	BFS-1200-03/AS-D
44	1200	6	1540	1410	32	36	105	BFS-1200-06/AS-D
45	1200	10	1540	1410	32	36	120	BFS-1200-10/AS-D
46	1200	16	1540	1410	32	36	155	BFS-1200-16/AS-D
47	1400	3	1700	1615	36	36	95	BFS-1400-03/AS-D
48	1400	6	1700	1615	36	36	120	BFS-1400-06/AS-D
49	1400	10	1700	1615	36	36	140	BFS-1400-10/AS-D
50	1400	16	1700	1615	36	36	175	BFS-1400-16/AS-D

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table D

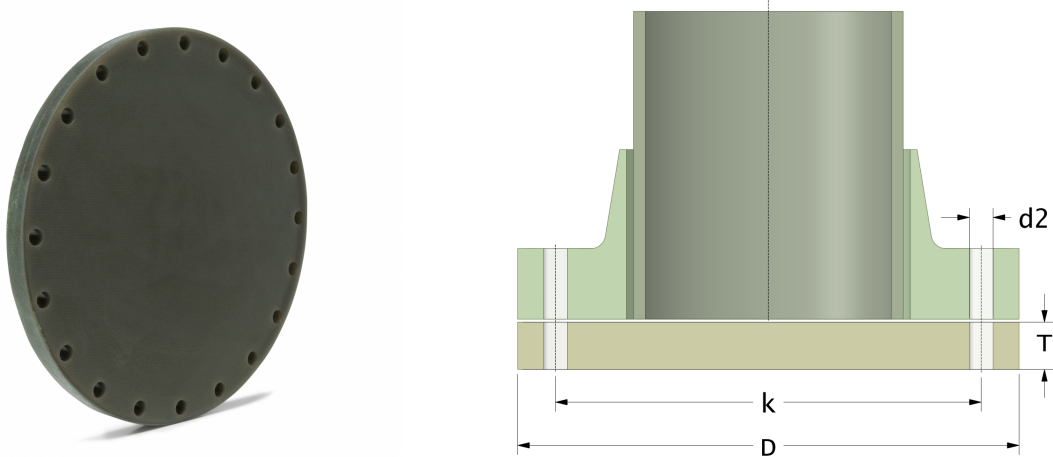

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
51	1600	3	1950	1825	40	39	100	BFS-1600-03/AS-D
52	1600	6	1950	1825	40	39	130	BFS-1600-06/AS-D
53	1600	10	1950	1825	40	39	155	BFS-1600-10/AS-D
54	1600	16	1950	1825	40	39	200	BFS-1600-16/AS-D
55	1800	3	2150	2019	44	42	120	BFS-1800-03/AS-D
56	1800	6	2150	2019	44	42	145	BFS-1800-06/AS-D
57	1800	10	2150	2019	44	42	175	BFS-1800-10/AS-D
58	1800	16	2150	2019	44	42	225	BFS-1800-16/AS-D
59	2000	3	2360	2250	44	42	125	BFS-2000-03/AS-D
60	2000	6	2360	2250	44	42	160	BFS-2000-06/AS-D
61	2000	10	2360	2250	44	42	195	BFS-2000-10/AS-D
62	2200	3	2580	2460	44	48	135	BFS-2200-03/AS-D
63	2200	6	2580	2460	44	48	175	BFS-2200-06/AS-D
64	2200	10	2580	2460	44	48	210	BFS-2200-10/AS-D
65	2400	3	2810	2673	52	48	155	BFS-2400-03/AS-D
66	2400	6	2810	2673	52	48	200	BFS-2400-06/AS-D
67	2400	10	2810	2673	52	48	240	BFS-2400-10/AS-D