


Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: JIS B2220 30K

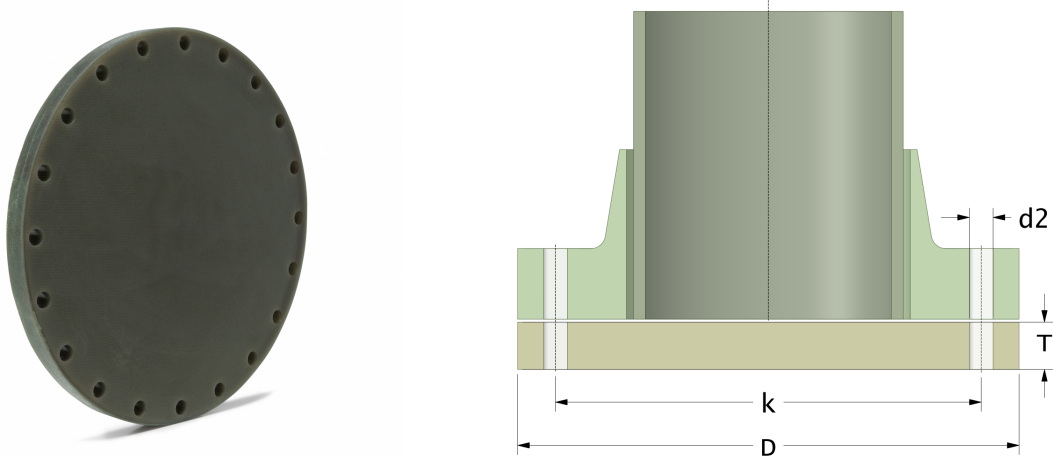

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	150	25	325	275	12	27	35	BFS-150-25/30K
2	150	32	325	275	12	27	40	BFS-150-32/30K
3	200	25	380	320	12	27	44	BFS-200-25/30K
4	200	32	380	320	12	27	48	BFS-200-32/30K
5	250	25	450	390	12	33	52	BFS-250-25/30K
6	250	32	450	390	12	33	60	BFS-250-32/30K
7	300	25	540	450	16	33	60	BFS-300-25/30K
8	300	32	540	450	16	33	68	BFS-300-32/30K
9	350	25	585	495	16	33	68	BFS-350-25/30K
10	350	32	585	495	16	33	74	BFS-350-32/30K
11	400	25	640	560	16	39	74	BFS-400-25/30K
12	400	32	640	560	16	39	85	BFS-400-32/30K