

Tuyaux par enroulement filamentaire

Tuyaux PRV

Resin Type: Derakane 411 with 2.5 mm inner liner



#	DN (mm)	Pmax. (bar)	I.D. (mm)	Wall Thickness (mm)	O.D. (mm)	L (Length) (m)	Article Number
1	25	16	25	5.0	35	4.0	PMS-25-16/400
2	32	16	32	5.0	42	4.0	PMS-32-16/400
3	40	16	40	5.0	50	4.0	PMS-40-16/400
4	50	16	50	5.0	60	4.0	PMS-50-16/400
5	65	16	65	5.0	75	5.8	PMS-65-16/600
6	80	16	80	5.0	90	5.8	PMS-80-16/600
7	100	16	100	5.0	110	5.8	PMS-100-16/600
8	125	16	125	5.0	135	5.8	PMS-125-16/600
9	150	16	150	5.5	161	5.8	PMS-150-16/600
10	200	10	200	5.0	210	5.8	PMS-200-10/600
11	200	16	200	6.0	212	5.8	PMS-200-16/600
12	250	10	250	5.5	261	5.8	PMS-250-10/600
13	250	16	250	6.5	263	5.8	PMS-250-16/600
14	300	10	300	6.0	312	5.8	PMS-300-10/600
15	300	16	300	7.5	315	5.8	PMS-300-16/600
16	350	10	350	6.5	363	5.8	PMS-350-10/600

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

06-07-2023

Tuyaux par enroulement filamentaire

Tuyaux PRV

Resin Type: Derakane 411 with 2.5 mm inner liner

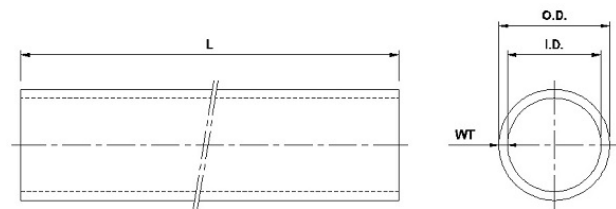

#	DN (mm)	Pmax. (bar)	I.D. (mm)	Wall Thickness (mm)	O.D. (mm)	L (Length) (m)	Article Number
17	350	16	350	8.0	366	5.8	PMS-350-16/600
18	400	10	400	7.0	414	5.8	PMS-400-10/600
19	400	16	400	8.5	417	5.8	PMS-400-16/600
20	450	10	450	7.5	465	5.8	PMS-450-10/600
21	450	16	450	9.5	469	5.8	PMS-450-16/600
22	500	10	500	8.0	516	5.8	PMS-500-10/600
23	500	16	500	10.5	521	5.8	PMS-500-16/600
24	600	10	600	9.0	618	5.8	PMS-600-10/600

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

06-07-2023