


# Brides tubulées

## Bride à collerette tubulée

Drilling Standard: EN1092 PN10, Resin Type: Derakane 411

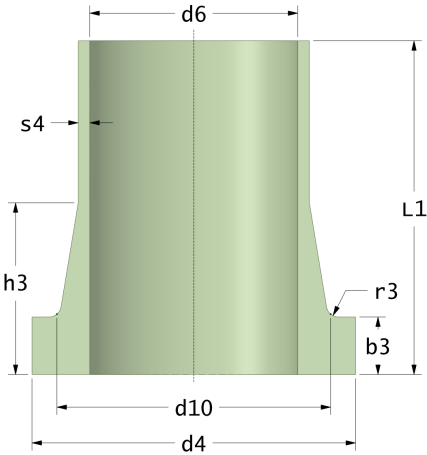

| #  | DN<br>(mm) | Pmax<br>(bar) | d4<br>(mm) | d6<br>(mm) | r3<br>(mm) | d10<br>(mm) | b3<br>(mm) | s4<br>(mm) | h3<br>(mm) | L1<br>(mm) | Article Number |
|----|------------|---------------|------------|------------|------------|-------------|------------|------------|------------|------------|----------------|
| 1  | 25         | 16            | 68         | 25         | 2          | 50          | 12         | 5          | 25         | 250        | TSS-25-250/EN  |
| 2  | 32         | 16            | 78         | 32         | 3          | 58          | 14         | 5          | 27         | 250        | TSS-32-250/EN  |
| 3  | 40         | 16            | 88         | 40         | 3          | 68          | 14         | 5          | 30         | 300        | TSS-40-300/EN  |
| 4  | 50         | 16            | 102        | 50         | 3          | 82          | 14         | 5          | 35         | 300        | TSS-50-300/EN  |
| 5  | 50         | 16            | 102        | 50         | 3          | 82          | 14         | 5          | 35         | 600        | TSS-50-600/EN  |
| 6  | 65         | 16            | 122        | 65         | 3          | 95          | 18         | 5          | 45         | 300        | TSS-65-300/EN  |
| 7  | 65         | 16            | 122        | 65         | 3          | 95          | 18         | 5          | 45         | 600        | TSS-65-600/EN  |
| 8  | 80         | 16            | 138        | 80         | 3          | 111         | 23         | 5          | 50         | 300        | TSS-80-300/EN  |
| 9  | 80         | 16            | 138        | 80         | 3          | 111         | 23         | 5          | 50         | 600        | TSS-80-600/EN  |
| 10 | 100        | 16            | 158        | 100        | 4          | 133         | 25         | 5          | 57         | 300        | TSS-100-300    |
| 11 | 100        | 16            | 158        | 100        | 4          | 133         | 25         | 5          | 57         | 600        | TSS-100-600    |
| 12 | 125        | 16            | 188        | 125        | 4          | 160         | 28         | 5          | 67         | 300        | TSS-125-300    |
| 13 | 125        | 16            | 188        | 125        | 4          | 160         | 28         | 5          | 67         | 600        | TSS-125-600    |
| 14 | 150        | 16            | 212        | 150        | 4          | 188         | 32         | 5.5        | 76         | 300        | TSS-150-300    |
| 15 | 150        | 16            | 212        | 150        | 4          | 188         | 32         | 5.5        | 76         | 600        | TSS-150-600    |
| 16 | 200        | 10            | 268        | 200        | 5          | 237         | 29         | 5          | 84         | 360        | TSS-200-360    |

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-08-2024

# Brides tubulées

## Bride à collerette tubulée

Drilling Standard: EN1092 PN10, Resin Type: Derakane 411

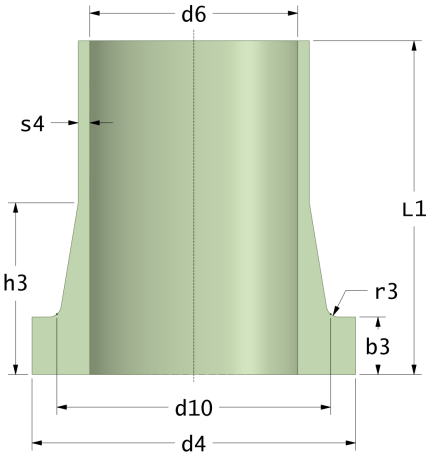

| #  | DN<br>(mm) | Pmax<br>(bar) | d4<br>(mm) | d6<br>(mm) | r3<br>(mm) | d10<br>(mm) | b3<br>(mm) | s4<br>(mm) | h3<br>(mm) | L1<br>(mm) | Article Number |
|----|------------|---------------|------------|------------|------------|-------------|------------|------------|------------|------------|----------------|
| 17 | 200        | 10            | 268        | 200        | 5          | 237         | 29         | 5          | 84         | 600        | TSS-200-600    |
| 18 | 200        | 16            | 268        | 200        | 5          | 237         | 35         | 6          | 90         | 360        | TSS-216-360    |
| 19 | 200        | 16            | 268        | 200        | 5          | 237         | 35         | 6          | 90         | 600        | TSS-216-600    |
| 20 | 250        | 10            | 320        | 250        | 5          | 293         | 38         | 5.5        | 106        | 360        | TSS-250-360    |
| 21 | 250        | 10            | 320        | 250        | 5          | 293         | 38         | 5.5        | 106        | 600        | TSS-250-600    |
| 22 | 300        | 10            | 376        | 300        | 5          | 343         | 40         | 6          | 121        | 360        | TSS-300-360    |
| 23 | 300        | 10            | 376        | 300        | 5          | 343         | 40         | 6          | 121        | 600        | TSS-300-600    |
| 24 | 350        | 10            | 436        | 350        | 7          | 398         | 38         | 8          | 135        | 360        | TSS-350-360    |
| 25 | 400        | 10            | 487        | 400        | 8          | 451         | 42         | 8          | 150        | 360        | TSS-400-360    |
| 26 | 400        | 10            | 487        | 400        | 8          | 451         | 42         | 8          | 150        | 600        | TSS-400-600    |
| 27 | 500        | 10            | 592        | 500        | 8          | 556         | 48         | 9          | 180        | 360        | TSS-500-360    |
| 28 | 500        | 10            | 592        | 500        | 8          | 556         | 48         | 9          | 180        | 600        | TSS-500-600    |
| 29 | 600        | 10            | 693        | 600        | 8          | 647         | 54         | 9          | 210        | 360        | TSS-600-360    |
| 30 | 600        | 10            | 693        | 600        | 8          | 647         | 54         | 9          | 210        | 600        | TSS-600-600    |

**Disclaimer**

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-08-2024