
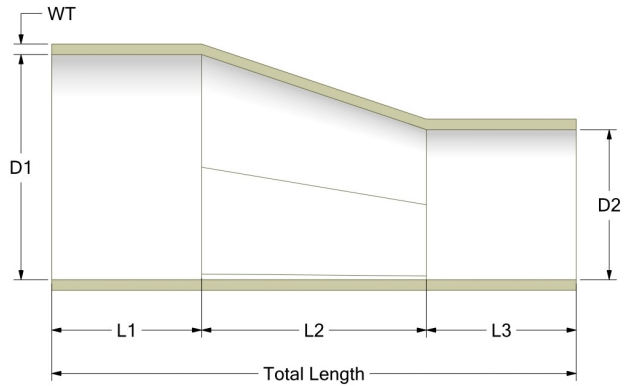


Rotec Reduceer stukken

Excentrisch - Plain End

All Products

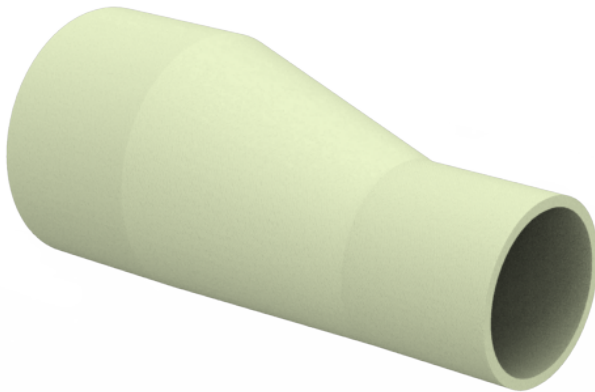

| # | D1 (mm) | D2 (mm) | Pmax (bar) | WT (mm) | L1 (mm) | L2 (mm) | L3 (mm) | Total length (mm) | Weight (kg) | Article Number |
|----|------------|------------|---------------|------------|------------|------------|------------|----------------------|----------------|----------------|
| 1 | 25 | 15 | 16 | 4.5 | 30 | 40 | 30 | 100 | 0.06 | RES-25-15-16 |
| 2 | 40 | 20 | 16 | 4.5 | 40 | 80 | 30 | 150 | 0.14 | RES-40-20-16 |
| 3 | 40 | 25 | 16 | 4.5 | 40 | 60 | 30 | 130 | 0.13 | RES-40-25-16 |
| 4 | 50 | 25 | 16 | 5 | 50 | 100 | 30 | 180 | 0.23 | RES-50-25-16 |
| 5 | 50 | 40 | 16 | 5 | 50 | 40 | 40 | 130 | 0.2 | RES-50-40-16 |
| 6 | 65 | 40 | 16 | 5 | 60 | 100 | 40 | 200 | 0.35 | RES-65-40-16 |
| 7 | 65 | 50 | 16 | 5 | 60 | 60 | 50 | 170 | 0.3 | RES-65-50-16 |
| 8 | 80 | 40 | 16 | 5.5 | 80 | 120 | 40 | 240 | 0.5 | RES-80-40-16 |
| 9 | 80 | 50 | 16 | 5.5 | 80 | 90 | 50 | 220 | 0.5 | RES-80-50-16 |
| 10 | 80 | 65 | 16 | 5.5 | 80 | 45 | 60 | 185 | 0.45 | RES-80-65-16 |
| 11 | 100 | 50 | 16 | 6 | 100 | 150 | 50 | 300 | 0.87 | RES-100-50-16 |
| 12 | 100 | 80 | 16 | 6 | 100 | 60 | 80 | 240 | 0.79 | RES-100-80-16 |
| 13 | 125 | 80 | 16 | 6 | 100 | 135 | 80 | 315 | 1.2 | RES-125-80-16 |
| 14 | 125 | 100 | 16 | 6 | 100 | 75 | 100 | 275 | 1.1 | RES-125-100-16 |
| 15 | 150 | 100 | 16 | 7 | 100 | 150 | 100 | 350 | 1.8 | RES-150-100-16 |
| 16 | 150 | 125 | 16 | 7 | 100 | 75 | 100 | 275 | 1.6 | RES-150-125-16 |


Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

Rotec Reduceer stukken

Excentrisch - Plain End

All Products

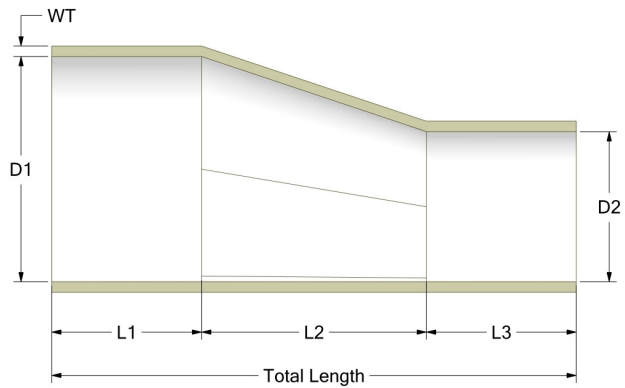

| # | D1 (mm) | D2 (mm) | Pmax (bar) | WT (mm) | L1 (mm) | L2 (mm) | L3 (mm) | Total length (mm) | Weight (kg) | Article Number |
|----|------------|------------|---------------|------------|------------|------------|------------|----------------------|----------------|----------------|
| 17 | 200 | 100 | 10 | 7 | 100 | 300 | 100 | 500 | 3.1 | RES-200-100-10 |
| 18 | 200 | 150 | 10 | 7 | 100 | 150 | 100 | 350 | 2.5 | RES-200-150-10 |
| 19 | 250 | 150 | 10 | 7.5 | 125 | 300 | 100 | 525 | 4.7 | RES-250-150-10 |
| 20 | 250 | 200 | 10 | 7.5 | 125 | 150 | 100 | 375 | 3.8 | RES-250-200-10 |
| 21 | 300 | 200 | 10 | 8 | 150 | 300 | 100 | 550 | 6.5 | RES-300-200-10 |
| 22 | 300 | 250 | 10 | 8 | 150 | 150 | 125 | 425 | 5.5 | RES-300-250-10 |

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

13-03-2024