

Rotec Blind Flenzen

Hars Epoxy (GRE)

Drilling Standard: EN1092 PN40



#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	32	98	65	4	14	28	BFE-15-32/40
2	20	32	98	75	4	14	28	BFE-20-32/40
3	25	32	116	85	4	14	28	BFE-25-32/40
4	32	32	140	100	4	18	28	BFE-32-32/40
5	40	32	154	110	4	18	28	BFE-40-32/40
6	50	32	164	125	4	18	28	BFE-50-32/40
7	65	32	184	145	4	18	28	BFE-65-32/40
8	80	32	200	160	8	18	35	BFE-80-32/40
9	100	32	228	190	8	22	35	BFE-100-32/40
10	125	32	270	220	8	26	34	BFE-125-32/40
11	150	32	305	250	8	26	40	BFE-150-32/40
12	200	32	380	320	12	30	48	BFE-200-32/40
13	250	32	450	385	12	33	60	BFE-250-32/40
14	300	32	540	450	16	33	68	BFE-300-32/40
15	350	32	585	510	16	36	74	BFE-350-32/40
16	400	32	660	585	16	39	85	BFE-400-32/40

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

09-02-2024

Rotec Blind Flenzen

Hars Epoxy (GRE)

Drilling Standard: EN1092 PN40

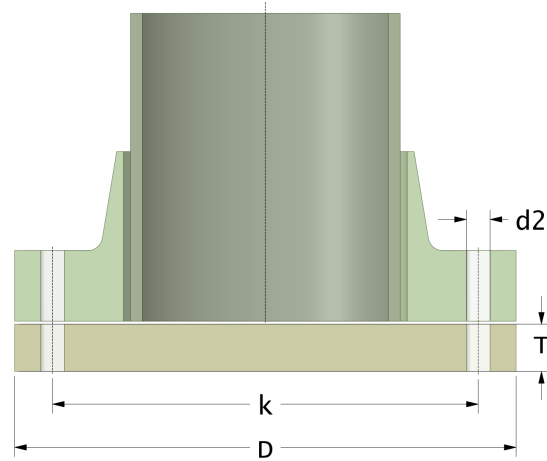

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	450	32	710	610	20	39	90	BFE-450-32/40

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

09-02-2024