

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN10




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	10	98	65	4	14	18	BFE-15-10/16
2	20	10	98	75	4	14	18	BFE-20-10/16
3	25	10	116	85	4	14	18	BFE-25-10/16
4	32	10	140	100	4	18	18	BFE-32-10/16
5	40	10	154	110	4	18	18	BFE-40-10/16
6	50	10	164	125	4	18	18	BFE-50-10/16
7	65	10	184	145	4	18	18	BFE-65-10/16
8	80	10	200	160	8	18	22	BFE-80-10/16
9	100	10	228	180	8	18	22	BFE-100-10/16
10	125	10	254	210	8	18	22	BFE-125-10/16
11	150	10	285	240	8	22	22	BFE-150-10/16
12	200	10	340	295	8	22	25	BFE-200-10/10
13	250	6	395	350	12	22	25	BFE-250-06/10
14	250	10	395	350	12	22	35	BFE-250-10/10
15	300	6	445	400	12	22	28	BFE-300-06/10
16	300	10	445	400	12	22	30	BFE-300-10/10

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN10




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	350	6	505	460	16	22	35	BFE-350-06/10
18	350	10	505	460	16	22	40	BFE-350-10/10
19	400	6	565	515	16	26	35	BFE-400-06/10
20	400	10	565	515	16	26	48	BFE-400-10/10
21	450	6	640	565	20	26	40	BFE-450-06/10
22	450	10	640	565	20	26	52	BFE-450-10/10
23	500	3	670	620	20	26	35	BFE-500-03/10
24	500	6	670	620	20	26	44	BFE-500-06/10
25	500	10	670	620	20	26	60	BFE-500-10/10
26	600	3	780	725	20	30	44	BFE-600-03/10
27	600	6	780	725	20	30	52	BFE-600-06/10
28	600	10	780	725	20	30	68	BFE-600-10/10
29	700	3	910	840	24	30	48	BFE-700-03/10
30	700	6	910	840	24	30	60	BFE-700-06/10
31	700	10	910	840	24	30	74	BFE-700-10/10
32	800	3	1015	950	24	33	60	BFE-800-03/10
33	800	6	1015	950	24	33	68	BFE-800-06/10

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN10

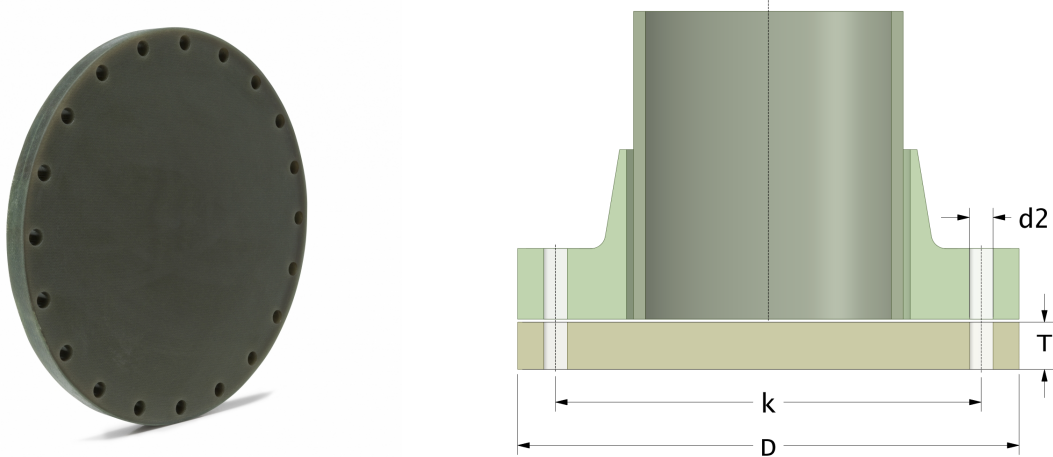

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	800	10	1015	950	24	33	85	BFE-800-10/10
35	900	3	1125	1050	28	33	60	BFE-900-03/10
36	900	6	1125	1050	28	33	78	BFE-900-06/10
37	900	10	1125	1050	28	33	95	BFE-900-10/10
38	1000	3	1230	1160	28	36	68	BFE-1000-03/10
39	1000	6	1230	1160	28	36	85	BFE-1000-06/10
40	1000	10	1230	1160	28	36	105	BFE-1000-10/10
41	1200	3	1484	1380	32	39	80	BFE-1200-03/10
42	1200	6	1484	1380	32	39	105	BFE-1200-06/10
43	1200	10	1484	1380	32	39	120	BFE-1200-10/10
44	1400	3	1685	1590	36	42	95	BFE-1400-03/10
45	1400	6	1685	1590	36	42	120	BFE-1400-06/10
46	1400	10	1685	1590	36	42	140	BFE-1400-10/10
47	1600	3	1930	1820	40	48	100	BFE-1600-03/10
48	1600	6	1930	1820	40	48	130	BFE-1600-06/10
49	1600	10	1930	1820	40	48	155	BFE-1600-10/10
50	1800	3	2130	2020	44	48	120	BFE-1800-03/10

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN10

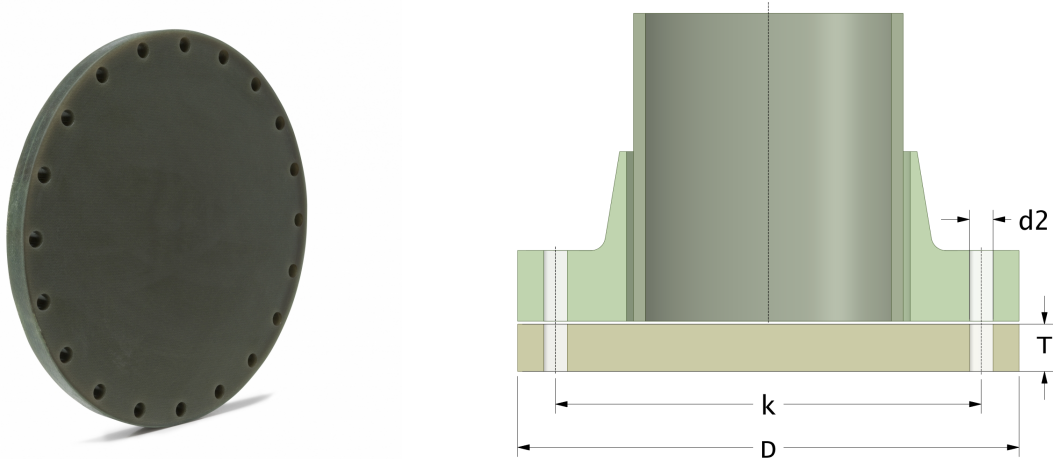

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
51	1800	6	2130	2020	44	48	145	BFE-1800-06/10
52	1800	10	2130	2020	44	48	175	BFE-1800-10/10
53	2000	3	2360	2230	48	48	125	BFE-2000-03/10
54	2000	6	2360	2230	48	48	160	BFE-2000-06/10
55	2000	10	2360	2230	48	48	195	BFE-2000-10/10
56	2200	3	2580	2440	52	56	135	BFE-2200-03/10
57	2200	6	2580	2440	52	56	175	BFE-2200-06/10
58	2200	10	2580	2440	52	56	210	BFE-2200-10/10
59	2400	3	2780	2650	56	56	150	BFE-2400-03/10
60	2400	6	2780	2650	56	56	190	BFE-2400-06/10
61	2400	10	2780	2650	56	56	230	BFE-2400-10/10

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

09-02-2024