



Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN10

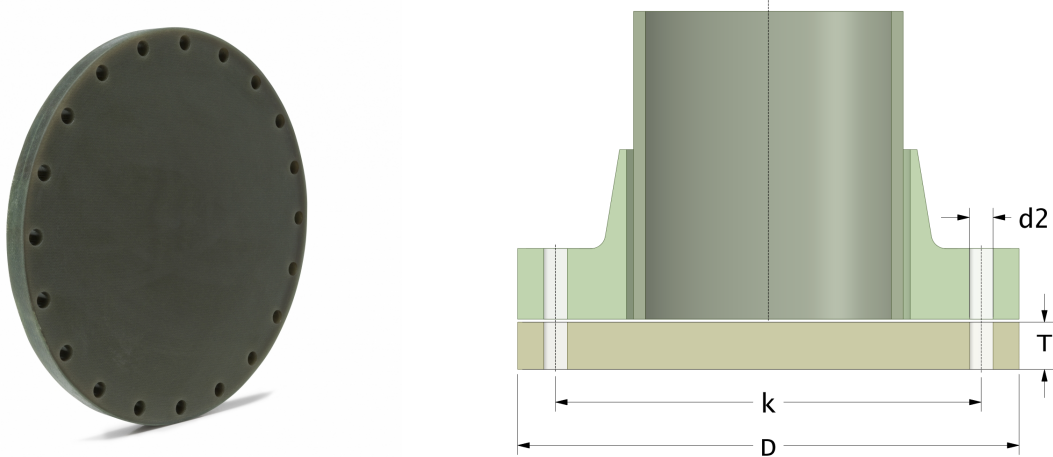


#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	10	98	65	4	14	18	BFC-15-10/16
2	20	10	98	75	4	14	18	BFC-20-10/16
3	25	10	116	85	4	14	18	BFC-25-10/16
4	32	10	140	100	4	18	18	BFC-32-10/16
5	40	10	154	110	4	18	18	BFC-40-10/16
6	50	10	164	125	4	18	18	BFC-50-10/16
7	65	10	184	145	4	18	18	BFC-65-10/16
8	80	10	200	160	8	18	22	BFC-80-10/16
9	100	10	228	180	8	18	22	BFC-100-10/16
10	125	10	254	210	8	18	22	BFC-125-10/16
11	150	10	285	240	8	22	22	BFC-150-10/16
12	200	10	340	295	8	22	25	BFC-200-10/10
13	250	6	395	350	12	22	25	BFC-250-06/10
14	250	10	395	350	12	22	35	BFC-250-10/10
15	300	6	445	400	12	22	28	BFC-300-06/10
16	300	10	445	400	12	22	30	BFC-300-10/10

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN10

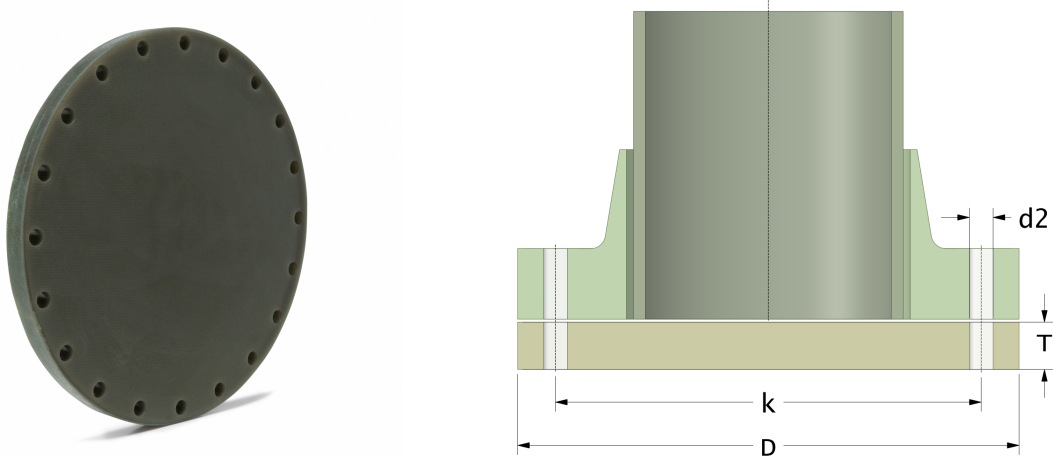


#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	350	6	505	460	16	22	35	BFC-350-06/10
18	350	10	505	460	16	22	40	BFC-350-10/10
19	400	6	565	515	16	26	35	BFC-400-06/10
20	400	10	565	515	16	26	48	BFC-400-10/10
21	450	6	640	565	20	26	40	BFC-450-06/10
22	450	10	640	565	20	26	52	BFC-450-10/10
23	500	3	670	620	20	26	35	BFC-500-03/10
24	500	6	670	620	20	26	44	BFC-500-06/10
25	500	10	670	620	20	26	60	BFC-500-10/10
26	600	3	780	725	20	30	44	BFC-600-03/10
27	600	6	780	725	20	30	52	BFC-600-06/10
28	600	10	780	725	20	30	68	BFC-600-10/10
29	700	3	910	840	24	30	48	BFC-700-03/10
30	700	6	910	840	24	30	60	BFC-700-06/10
31	700	10	910	840	24	30	74	BFC-700-10/10
32	800	3	1015	950	24	33	60	BFC-800-03/10
33	800	6	1015	950	24	33	68	BFC-800-06/10

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN10

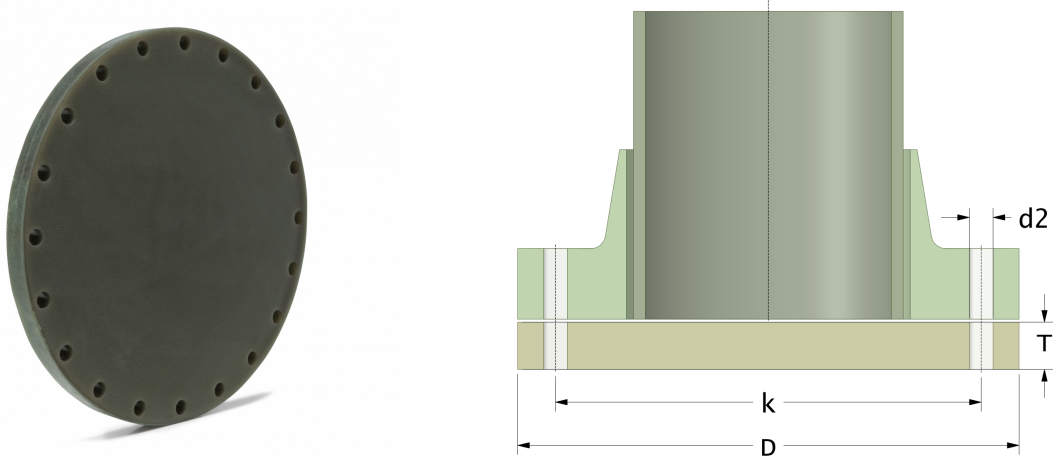

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	800	10	1015	950	24	33	85	BFC-800-10/10
35	900	3	1125	1050	28	33	60	BFC-900-03/10
36	900	6	1125	1050	28	33	78	BFC-900-06/10
37	900	10	1125	1050	28	33	95	BFC-900-10/10
38	1000	3	1230	1160	28	36	68	BFC-1000-03/10
39	1000	6	1230	1160	28	36	85	BFC-1000-06/10
40	1000	10	1230	1160	28	36	105	BFC-1000-10/10
41	1200	3	1484	1380	32	39	80	BFC-1200-03/10
42	1200	6	1484	1380	32	39	105	BFC-1200-06/10
43	1200	10	1484	1380	32	39	120	BFC-1200-10/10
44	1400	3	1685	1590	36	42	95	BFC-1400-03/10
45	1400	6	1685	1590	36	42	120	BFC-1400-06/10
46	1400	10	1685	1590	36	42	140	BFC-1400-10/10
47	1600	3	1930	1820	40	48	100	BFC-1600-03/10
48	1600	6	1930	1820	40	48	130	BFC-1600-06/10
49	1600	10	1930	1820	40	48	155	BFC-1600-10/10
50	1800	3	2130	2020	44	48	120	BFC-1800-03/10

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN10

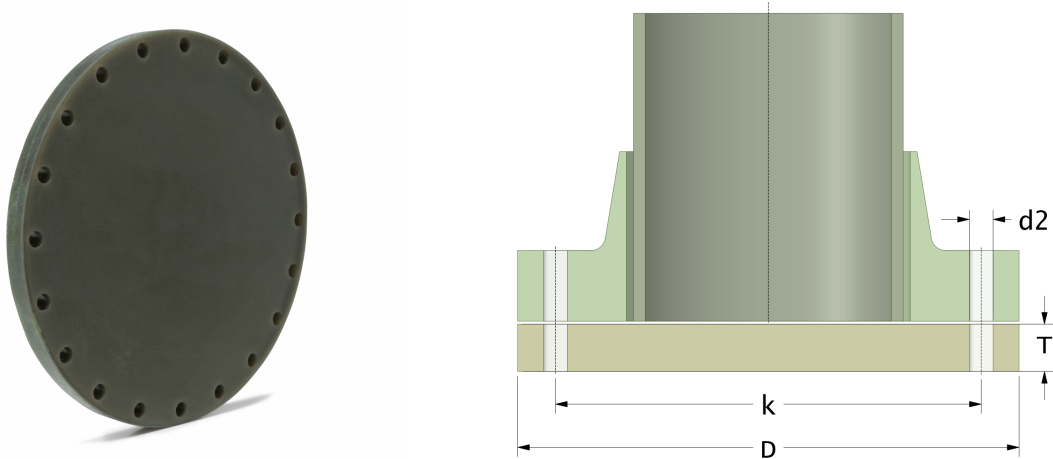

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
51	1800	6	2130	2020	44	48	145	BFC-1800-06/10
52	1800	10	2130	2020	44	48	175	BFC-1800-10/10
53	2000	3	2360	2230	48	48	125	BFC-2000-03/10
54	2000	6	2360	2230	48	48	160	BFC-2000-06/10
55	2000	10	2360	2230	48	48	195	BFC-2000-10/10
56	2200	3	2580	2440	52	56	135	BFC-2200-03/10
57	2200	6	2580	2440	52	56	175	BFC-2200-06/10
58	2200	10	2580	2440	52	56	210	BFC-2200-10/10
59	2400	3	2780	2650	56	56	150	BFC-2400-03/10
60	2400	6	2780	2650	56	56	190	BFC-2400-06/10
61	2400	10	2780	2650	56	56	230	BFC-2400-10/10