



Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN25

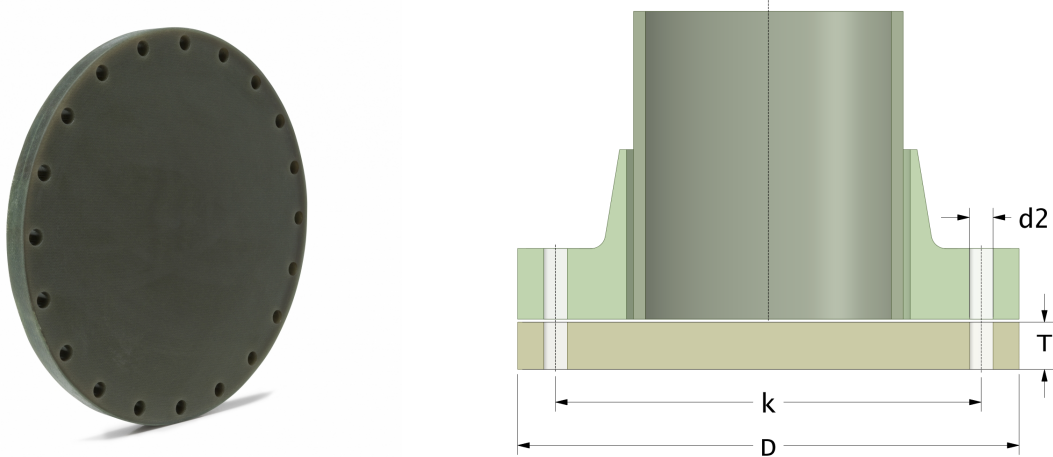


#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	25	98	65	4	14	24	BFC-15-25/25
2	20	25	98	75	4	14	24	BFC-20-25/25
3	25	25	116	85	4	14	24	BFC-25-25/25
4	32	25	140	100	4	18	24	BFC-32-25/25
5	40	25	154	110	4	18	24	BFC-40-25/25
6	50	25	164	125	4	18	24	BFC-50-25/25
7	65	25	184	145	4	18	24	BFC-65-25/25
8	80	25	200	160	8	18	28	BFC-80-25/25
9	100	25	228	190	8	22	28	BFC-100-25/25
10	125	25	270	220	8	26	30	BFC-125-25/25
11	150	20	305	250	8	26	30	BFC-150-20/25
12	150	25	305	250	8	26	35	BFC-150-25/25
13	200	20	380	310	12	26	40	BFC-200-20/25
14	200	25	380	310	12	26	44	BFC-200-25/25
15	250	20	430	370	12	30	44	BFC-250-20/25
16	250	25	430	370	12	30	52	BFC-250-25/25

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN25

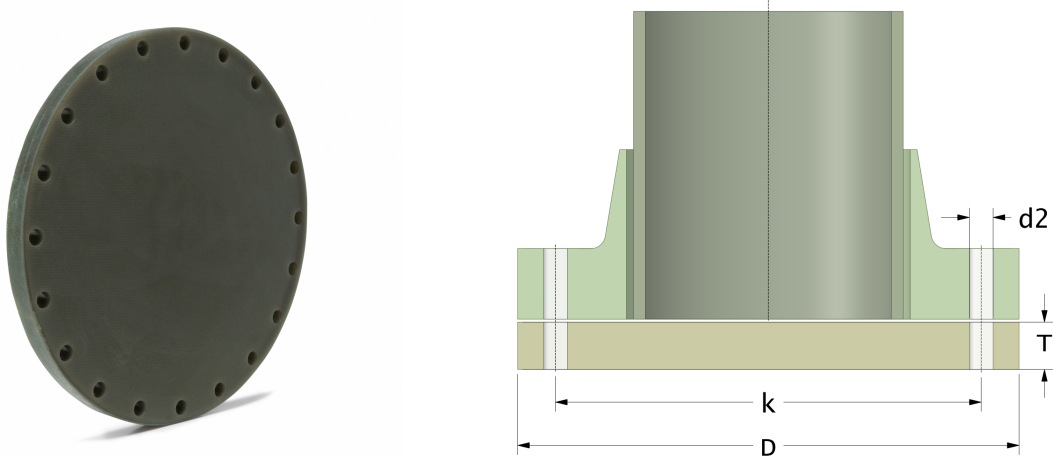

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	300	20	490	430	16	30	52	BFC-300-20/25
18	300	25	490	430	16	30	60	BFC-300-25/25
19	350	20	585	490	16	33	60	BFC-350-20/25
20	350	25	585	490	16	33	68	BFC-350-25/25
21	400	20	640	550	16	36	68	BFC-400-20/25
22	400	25	640	550	16	36	74	BFC-400-25/25
23	500	20	735	660	20	36	80	BFC-500-20/25
24	500	25	735	660	20	36	90	BFC-500-25/25
25	600	20	850	770	20	39	95	BFC-600-20/25
26	600	25	850	770	20	39	105	BFC-600-25/25
27	700	20	960	875	24	42	105	BFC-700-20/25
28	700	25	960	875	24	42	120	BFC-700-25/25
29	800	20	1085	990	24	48	120	BFC-800-20/25
30	800	25	1085	990	24	48	130	BFC-800-25/25
31	900	20	1200	1090	28	48	130	BFC-900-20/25
32	900	25	1200	1090	28	48	145	BFC-900-25/25
33	1000	20	1320	1210	28	56	145	BFC-1000-20/25

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: EN1092 PN25

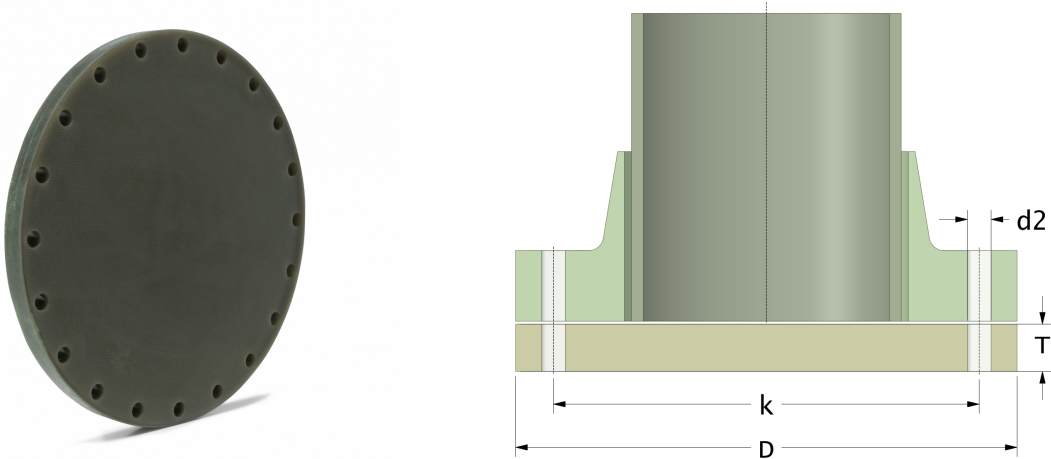

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	1000	25	1320	1210	28	56	160	BFC-1000-25/25
35	1200	20	1540	1420	32	56	170	BFC-1200-20/25