

**Blind Flansche**  
Matrix (Harztyp) Epoxy (Huntsman)  
Drilling Standard: EN1092 PN10




| #  | DN<br>(mm) | Pmax<br>(bar) | D<br>(mm) | k<br>(mm) | Holes<br>(no.) | d2<br>(mm) | T<br>(mm) | Article Number |
|----|------------|---------------|-----------|-----------|----------------|------------|-----------|----------------|
| 1  | 15         | 10            | 98        | 65        | 4              | 14         | 18        | BFE-15-10/16   |
| 2  | 20         | 10            | 98        | 75        | 4              | 14         | 18        | BFE-20-10/16   |
| 3  | 25         | 10            | 116       | 85        | 4              | 14         | 18        | BFE-25-10/16   |
| 4  | 32         | 10            | 140       | 100       | 4              | 18         | 18        | BFE-32-10/16   |
| 5  | 40         | 10            | 154       | 110       | 4              | 18         | 18        | BFE-40-10/16   |
| 6  | 50         | 10            | 164       | 125       | 4              | 18         | 18        | BFE-50-10/16   |
| 7  | 65         | 10            | 184       | 145       | 4              | 18         | 18        | BFE-65-10/16   |
| 8  | 80         | 10            | 200       | 160       | 8              | 18         | 22        | BFE-80-10/16   |
| 9  | 100        | 10            | 228       | 180       | 8              | 18         | 22        | BFE-100-10/16  |
| 10 | 125        | 10            | 254       | 210       | 8              | 18         | 22        | BFE-125-10/16  |
| 11 | 150        | 10            | 285       | 240       | 8              | 22         | 22        | BFE-150-10/16  |
| 12 | 200        | 10            | 340       | 295       | 8              | 22         | 25        | BFE-200-10/10  |
| 13 | 250        | 6             | 395       | 350       | 12             | 22         | 25        | BFE-250-06/10  |
| 14 | 250        | 10            | 395       | 350       | 12             | 22         | 35        | BFE-250-10/10  |
| 15 | 300        | 6             | 445       | 400       | 12             | 22         | 28        | BFE-300-06/10  |
| 16 | 300        | 10            | 445       | 400       | 12             | 22         | 30        | BFE-300-10/10  |

**Blind Flansche**  
Matrix (Harztyp) Epoxy (Huntsman)  
Drilling Standard: EN1092 PN10




| #  | DN<br>(mm) | Pmax<br>(bar) | D<br>(mm) | k<br>(mm) | Holes<br>(no.) | d2<br>(mm) | T<br>(mm) | Article Number |
|----|------------|---------------|-----------|-----------|----------------|------------|-----------|----------------|
| 17 | 350        | 6             | 505       | 460       | 16             | 22         | 35        | BFE-350-06/10  |
| 18 | 350        | 10            | 505       | 460       | 16             | 22         | 40        | BFE-350-10/10  |
| 19 | 400        | 6             | 565       | 515       | 16             | 26         | 35        | BFE-400-06/10  |
| 20 | 400        | 10            | 565       | 515       | 16             | 26         | 48        | BFE-400-10/10  |
| 21 | 450        | 6             | 640       | 565       | 20             | 26         | 40        | BFE-450-06/10  |
| 22 | 450        | 10            | 640       | 565       | 20             | 26         | 52        | BFE-450-10/10  |
| 23 | 500        | 3             | 670       | 620       | 20             | 26         | 35        | BFE-500-03/10  |
| 24 | 500        | 6             | 670       | 620       | 20             | 26         | 44        | BFE-500-06/10  |
| 25 | 500        | 10            | 670       | 620       | 20             | 26         | 60        | BFE-500-10/10  |
| 26 | 600        | 3             | 780       | 725       | 20             | 30         | 44        | BFE-600-03/10  |
| 27 | 600        | 6             | 780       | 725       | 20             | 30         | 52        | BFE-600-06/10  |
| 28 | 600        | 10            | 780       | 725       | 20             | 30         | 68        | BFE-600-10/10  |
| 29 | 700        | 3             | 910       | 840       | 24             | 30         | 48        | BFE-700-03/10  |
| 30 | 700        | 6             | 910       | 840       | 24             | 30         | 60        | BFE-700-06/10  |
| 31 | 700        | 10            | 910       | 840       | 24             | 30         | 74        | BFE-700-10/10  |
| 32 | 800        | 3             | 1015      | 950       | 24             | 33         | 60        | BFE-800-03/10  |
| 33 | 800        | 6             | 1015      | 950       | 24             | 33         | 68        | BFE-800-06/10  |

**Blind Flansche**  
Matrix (Harztyp) Epoxy (Huntsman)  
Drilling Standard: EN1092 PN10

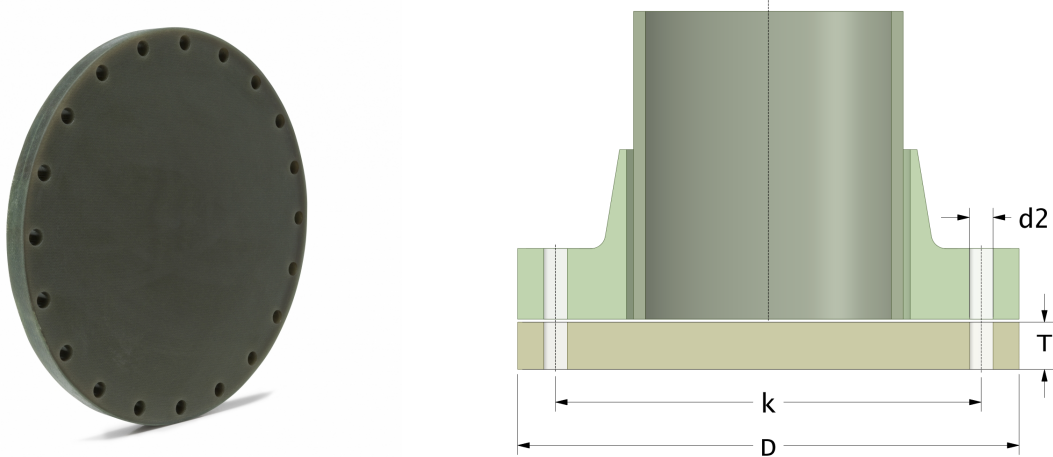

| #  | DN<br>(mm) | Pmax<br>(bar) | D<br>(mm) | k<br>(mm) | Holes<br>(no.) | d2<br>(mm) | T<br>(mm) | Article Number |
|----|------------|---------------|-----------|-----------|----------------|------------|-----------|----------------|
| 34 | 800        | 10            | 1015      | 950       | 24             | 33         | 85        | BFE-800-10/10  |
| 35 | 900        | 3             | 1125      | 1050      | 28             | 33         | 60        | BFE-900-03/10  |
| 36 | 900        | 6             | 1125      | 1050      | 28             | 33         | 78        | BFE-900-06/10  |
| 37 | 900        | 10            | 1125      | 1050      | 28             | 33         | 95        | BFE-900-10/10  |
| 38 | 1000       | 3             | 1230      | 1160      | 28             | 36         | 68        | BFE-1000-03/10 |
| 39 | 1000       | 6             | 1230      | 1160      | 28             | 36         | 85        | BFE-1000-06/10 |
| 40 | 1000       | 10            | 1230      | 1160      | 28             | 36         | 105       | BFE-1000-10/10 |
| 41 | 1200       | 3             | 1484      | 1380      | 32             | 39         | 80        | BFE-1200-03/10 |
| 42 | 1200       | 6             | 1484      | 1380      | 32             | 39         | 105       | BFE-1200-06/10 |
| 43 | 1200       | 10            | 1484      | 1380      | 32             | 39         | 120       | BFE-1200-10/10 |
| 44 | 1400       | 3             | 1685      | 1590      | 36             | 42         | 95        | BFE-1400-03/10 |
| 45 | 1400       | 6             | 1685      | 1590      | 36             | 42         | 120       | BFE-1400-06/10 |
| 46 | 1400       | 10            | 1685      | 1590      | 36             | 42         | 140       | BFE-1400-10/10 |
| 47 | 1600       | 3             | 1930      | 1820      | 40             | 48         | 100       | BFE-1600-03/10 |
| 48 | 1600       | 6             | 1930      | 1820      | 40             | 48         | 130       | BFE-1600-06/10 |
| 49 | 1600       | 10            | 1930      | 1820      | 40             | 48         | 155       | BFE-1600-10/10 |
| 50 | 1800       | 3             | 2130      | 2020      | 44             | 48         | 120       | BFE-1800-03/10 |

**Blind Flansche**  
Matrix (Harztyp) Epoxy (Huntsman)  
Drilling Standard: EN1092 PN10

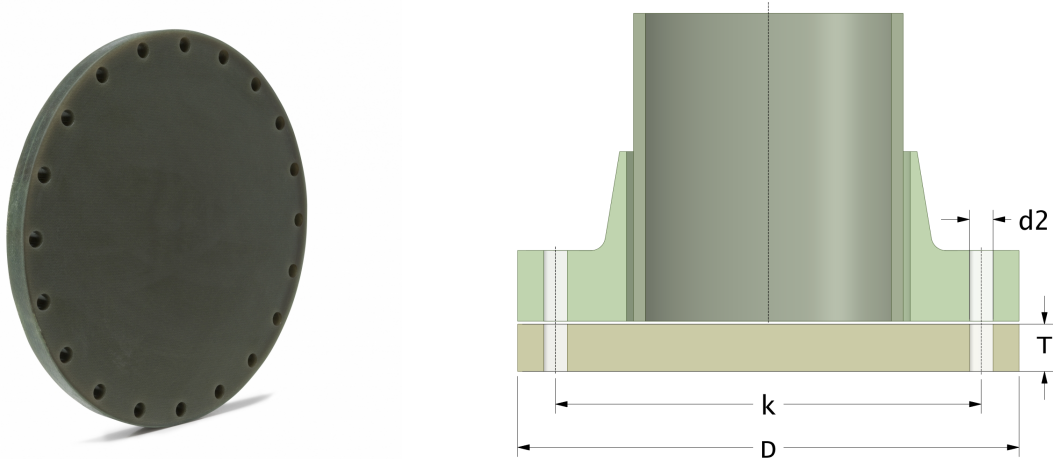

| #  | DN<br>(mm) | Pmax<br>(bar) | D<br>(mm) | k<br>(mm) | Holes<br>(no.) | d2<br>(mm) | T<br>(mm) | Article Number |
|----|------------|---------------|-----------|-----------|----------------|------------|-----------|----------------|
| 51 | 1800       | 6             | 2130      | 2020      | 44             | 48         | 145       | BFE-1800-06/10 |
| 52 | 1800       | 10            | 2130      | 2020      | 44             | 48         | 175       | BFE-1800-10/10 |
| 53 | 2000       | 3             | 2360      | 2230      | 48             | 48         | 125       | BFE-2000-03/10 |
| 54 | 2000       | 6             | 2360      | 2230      | 48             | 48         | 160       | BFE-2000-06/10 |
| 55 | 2000       | 10            | 2360      | 2230      | 48             | 48         | 195       | BFE-2000-10/10 |
| 56 | 2200       | 3             | 2580      | 2440      | 52             | 56         | 135       | BFE-2200-03/10 |
| 57 | 2200       | 6             | 2580      | 2440      | 52             | 56         | 175       | BFE-2200-06/10 |
| 58 | 2200       | 10            | 2580      | 2440      | 52             | 56         | 210       | BFE-2200-10/10 |
| 59 | 2400       | 3             | 2780      | 2650      | 56             | 56         | 150       | BFE-2400-03/10 |
| 60 | 2400       | 6             | 2780      | 2650      | 56             | 56         | 190       | BFE-2400-06/10 |
| 61 | 2400       | 10            | 2780      | 2650      | 56             | 56         | 230       | BFE-2400-10/10 |

**Disclaimer**

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

09-02-2024