



Blind Flansche
Matrix (Harztyp) Epoxy (Huntsman)
Drilling Standard: EN1092 PN40

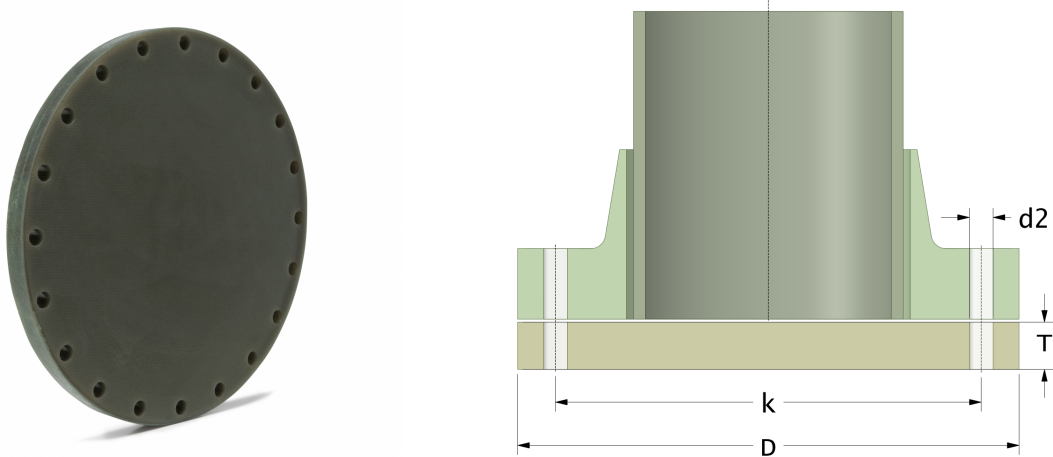

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	32	98	65	4	14	28	BFE-15-32/40
2	20	32	98	75	4	14	28	BFE-20-32/40
3	25	32	116	85	4	14	28	BFE-25-32/40
4	32	32	140	100	4	18	28	BFE-32-32/40
5	40	32	154	110	4	18	28	BFE-40-32/40
6	50	32	164	125	4	18	28	BFE-50-32/40
7	65	32	184	145	4	18	28	BFE-65-32/40
8	80	32	200	160	8	18	35	BFE-80-32/40
9	100	32	228	190	8	22	35	BFE-100-32/40
10	125	32	270	220	8	26	34	BFE-125-32/40
11	150	32	305	250	8	26	40	BFE-150-32/40
12	200	32	380	320	12	30	48	BFE-200-32/40
13	250	32	450	385	12	33	60	BFE-250-32/40
14	300	32	540	450	16	33	68	BFE-300-32/40
15	350	32	585	510	16	36	74	BFE-350-32/40
16	400	32	660	585	16	39	85	BFE-400-32/40

Blind Flansche
Matrix (Harztyp) Epoxy (Huntsman)
Drilling Standard: EN1092 PN40

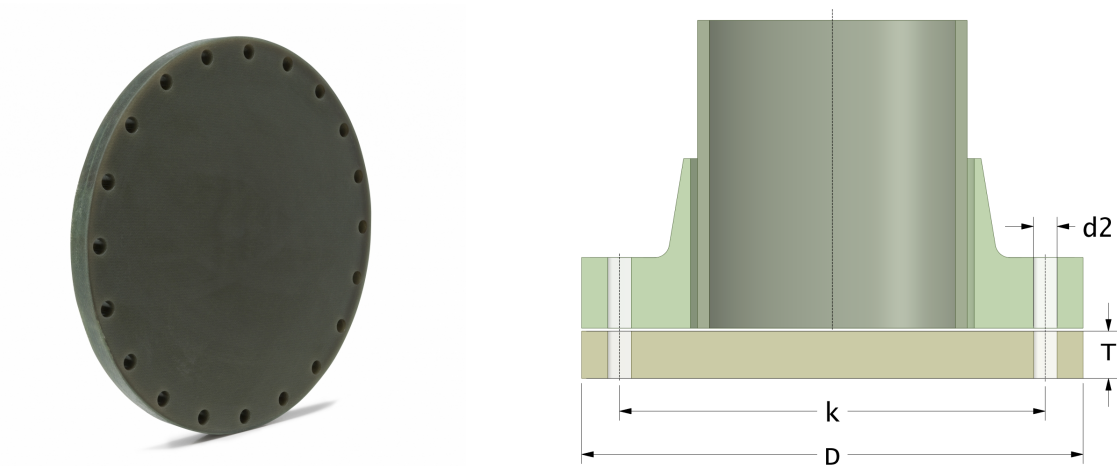

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	450	32	710	610	20	39	90	BFE-450-32/40