

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table F




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	150	20	305	260	12	22	30	BFS-150-20/AS-F
2	150	25	305	260	12	22	35	BFS-150-25/AS-F
3	150	32	305	260	12	22	40	BFS-150-32/AS-F
4	200	20	380	324	12	22	40	BFS-200-20/AS-F
5	200	25	380	324	12	22	44	BFS-200-25/AS-F
6	200	32	380	324	12	22	48	BFS-200-32/AS-F
7	250	20	430	381	12	26	44	BFS-250-20/AS-F
8	250	25	430	381	12	26	52	BFS-250-25/AS-F
9	250	32	430	381	12	26	60	BFS-250-32/AS-F
10	300	20	490	438	16	26	52	BFS-300-20/AS-F
11	300	25	490	438	16	26	60	BFS-300-25/AS-F
12	300	32	540	438	16	26	68	BFS-300-32/AS-F
13	350	20	585	495	16	30	60	BFS-350-20/AS-F
14	350	25	585	495	16	30	68	BFS-350-25/AS-F
15	350	32	585	495	16	30	74	BFS-350-32/AS-F
16	400	20	640	552	20	30	68	BFS-400-20/AS-F

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table F



#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	400	25	640	552	20	30	74	BFS-400-25/AS-F
18	400	32	640	552	20	30	85	BFS-400-32/AS-F
19	450	20	710	610	20	33	74	BFS-450-20/AS-F
20	450	25	710	610	20	33	85	BFS-450-25/AS-F
21	450	32	710	610	20	33	90	BFS-450-32/AS-F
22	500	20	735	673	24	33	80	BFS-500-20/AS-F
23	500	25	735	673	24	33	90	BFS-500-25/AS-F
24	550	20	785	724	24	33	85	BFS-550-20/AS-F
25	550	25	785	724	24	33	100	BFS-550-25/AS-F
26	600	20	850	781	24	36	95	BFS-600-20/AS-F
27	600	25	850	781	24	36	105	BFS-600-25/AS-F
28	700	20	960	857	24	36	110	BFS-700-20/AS-F
29	700	25	960	857	24	36	120	BFS-700-25/AS-F
30	800	20	1085	984	28	36	120	BFS-800-20/AS-F
31	800	25	1085	984	28	36	130	BFS-800-25/AS-F
32	900	20	1200	1105	32	39	130	BFS-900-20/AS-F
33	900	25	1190	1105	32	39	155	BFS-900-25/AS-F

Bridas ciegas
Resina Derakane 411 (o equivalente)
Drilling Standard: AS 2129 Table F

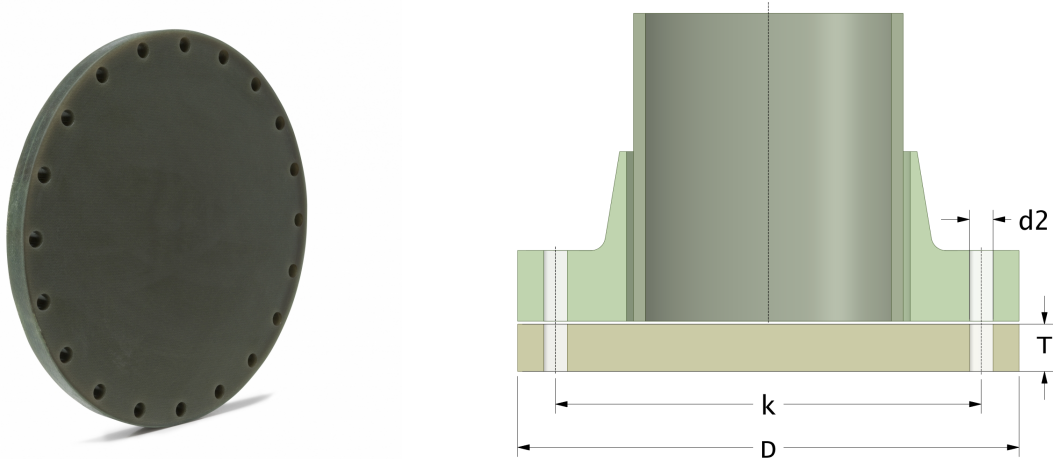

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	1000	20	1320	1194	36	39	145	BFS-1000-20/AS-F
35	1000	25	1320	1194	36	39	160	BFS-1000-25/AS-F
36	1200	20	1540	1441	40	42	170	BFS-1200-20/AS-F