

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: ANSI B16.5 Class 300




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	25	16	125	89	4	19	20	BFC-25-16/300
2	40	16	154	114	4	22	20	BFC-40-16/300
3	50	16	164	127	8	19	20	BFC-50-16/300
4	65	16	200	149	8	22	20	BFC-65-16/300
5	80	16	220	168	8	22	25	BFC-80-16/300
6	100	16	255	200	8	22	25	BFC-100-16/300
7	125	16	285	235	8	22	30	BFC-125-16/300
8	150	16	325	270	12	22	28	BFC-150-16/300
9	150	20	325	270	12	22	30	BFC-150-20/300
10	150	25	325	270	12	22	35	BFC-150-25/300
11	200	16	380	330	12	25	35	BFC-200-16/300
12	200	20	380	330	12	25	40	BFC-200-20/300
13	200	25	380	330	12	25	44	BFC-200-25/300
14	250	16	450	387	16	29	40	BFC-250-16/300
15	250	20	450	387	16	29	44	BFC-250-20/300
16	250	25	450	387	16	29	52	BFC-250-25/300

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: ANSI B16.5 Class 300



#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	300	16	540	451	16	32	48	BFC-300-16/300
18	300	20	540	451	16	32	52	BFC-300-20/300
19	300	25	540	451	16	32	60	BFC-300-25/300
20	350	16	585	514	20	32	52	BFC-350-16/300
21	350	20	585	514	20	32	60	BFC-350-20/300
22	350	25	585	514	20	32	68	BFC-350-25/300
23	400	16	660	572	20	35	60	BFC-400-16/300
24	400	20	660	572	20	35	68	BFC-400-20/300
25	400	25	660	572	20	35	74	BFC-400-25/300
26	450	16	710	629	24	35	68	BFC-450-16/300
27	450	20	710	629	24	35	74	BFC-450-20/300
28	450	25	710	629	24	35	85	BFC-450-25/300
29	500	16	775	686	24	35	74	BFC-500-16/300
30	500	20	775	686	24	35	80	BFC-500-20/300
31	500	25	775	686	24	35	90	BFC-500-25/300
32	600	16	915	813	24	41	85	BFC-600-16/300
33	600	20	915	813	24	41	95	BFC-600-20/300

Blind Flenzen
Matrix (hars) Derakane 470
Drilling Standard: ANSI B16.5 Class 300

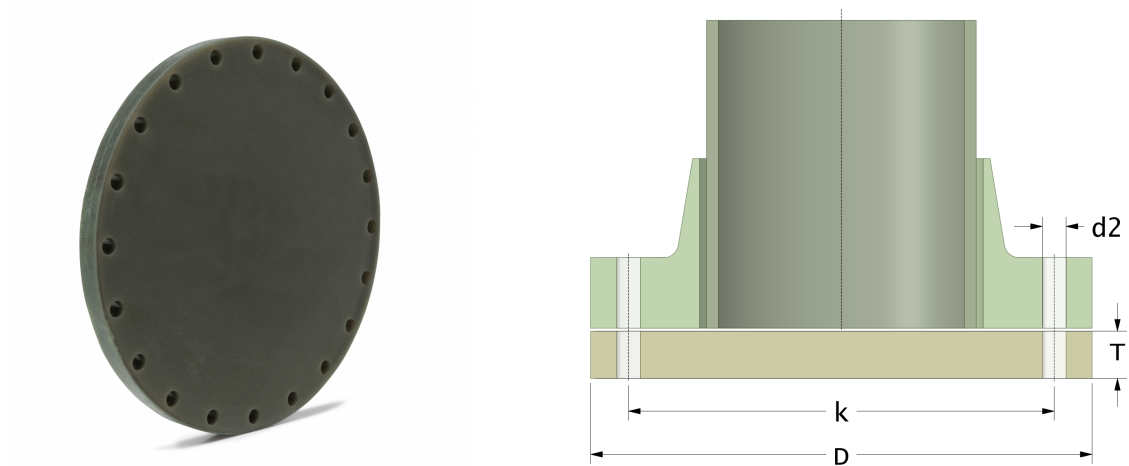

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	600	25	915	813	24	41	105	BFC-600-25/300