

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN16




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	15	10	98	65	4	14	18	BFE-15-10/16
2	15	16	98	65	4	14	18	BFE-15-16/16
3	20	10	98	75	4	14	18	BFE-20-10/16
4	20	16	98	75	4	14	18	BFE-20-16/16
5	25	10	116	85	4	14	18	BFE-25-10/16
6	25	16	116	85	4	14	20	BFE-25-16/16
7	32	10	140	100	4	18	18	BFE-32-10/16
8	32	16	140	100	4	18	18	BFE-32-16/16
9	40	10	154	110	4	18	18	BFE-40-10/16
10	40	16	154	110	4	18	20	BFE-40-16/16
11	50	10	164	125	4	18	18	BFE-50-10/16
12	50	16	164	125	4	18	20	BFE-50-16/16
13	65	10	184	145	4	18	18	BFE-65-10/16
14	65	16	184	145	4	18	20	BFE-65-16/16
15	80	10	200	160	8	18	22	BFE-80-10/16
16	80	16	200	160	8	18	25	BFE-80-16/16

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN16




#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	100	10	228	180	8	18	22	BFE-100-10/16
18	100	16	228	180	8	18	25	BFE-100-16/16
19	125	10	254	210	8	18	22	BFE-125-10/16
20	125	16	254	210	8	18	22	BFE-125-16/16
21	150	10	285	240	8	22	22	BFE-150-10/16
22	150	16	285	240	8	22	28	BFE-150-16/16
23	200	10	340	295	12	22	25	BFE-200-10/16
24	200	16	340	295	12	22	35	BFE-200-16/16
25	250	10	405	355	12	26	35	BFE-250-10/16
26	250	16	405	355	12	26	40	BFE-250-16/16
27	300	10	460	410	12	26	40	BFE-300-10/16
28	300	16	460	410	12	26	48	BFE-300-16/16
29	350	10	520	470	16	26	40	BFE-350-10/16
30	350	16	520	470	16	26	52	BFE-350-16/16
31	400	10	585	525	16	30	48	BFE-400-10/16
32	400	16	585	525	16	30	60	BFE-400-16/16
33	450	10	640	585	20	30	52	BFE-450-10/16

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN16

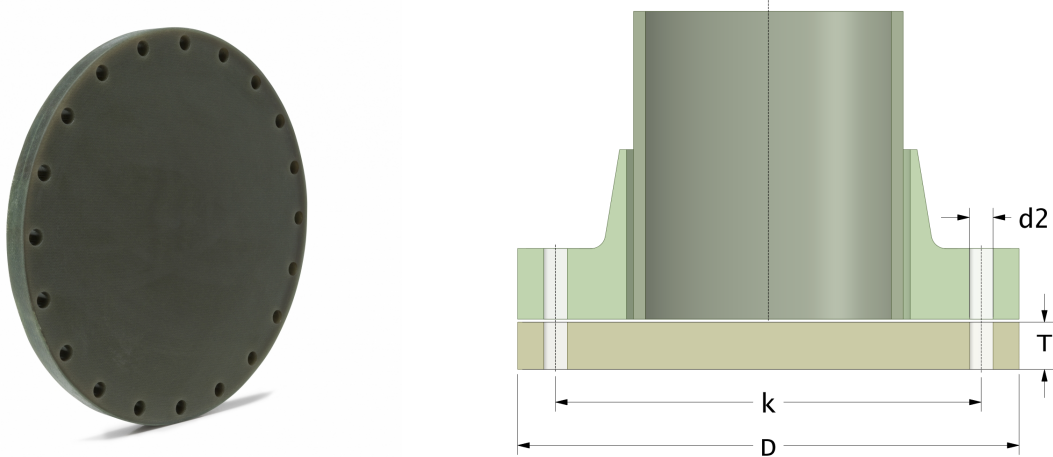

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	450	16	640	585	20	30	68	BFE-450-16/16
35	500	10	715	650	20	33	60	BFE-500-10/16
36	500	16	715	650	20	33	74	BFE-500-16/16
37	600	10	840	770	20	36	68	BFE-600-10/16
38	600	16	840	770	20	36	85	BFE-600-16/16
39	700	10	910	840	24	36	74	BFE-700-10/16
40	700	16	910	840	24	36	92	BFE-700-16/16
41	800	10	1025	950	24	39	85	BFE-800-10/16
42	800	16	1025	950	24	39	105	BFE-800-16/16
43	900	10	1125	1050	28	39	95	BFE-900-10/16
44	900	16	1125	1050	28	39	115	BFE-900-16/16
45	1000	10	1255	1170	28	42	105	BFE-1000-10/16
46	1000	16	1255	1170	28	42	130	BFE-1000-16/16
47	1200	10	1484	1390	32	48	120	BFE-1200-10/16
48	1200	16	1484	1390	32	48	155	BFE-1200-16/16
49	1400	10	1685	1590	36	48	140	BFE-1400-10/16
50	1400	16	1685	1590	36	48	175	BFE-1400-16/16

Blind Flenzen
Matrix (hars) Epoxy (Huntsman)
Drilling Standard: EN1092 PN16

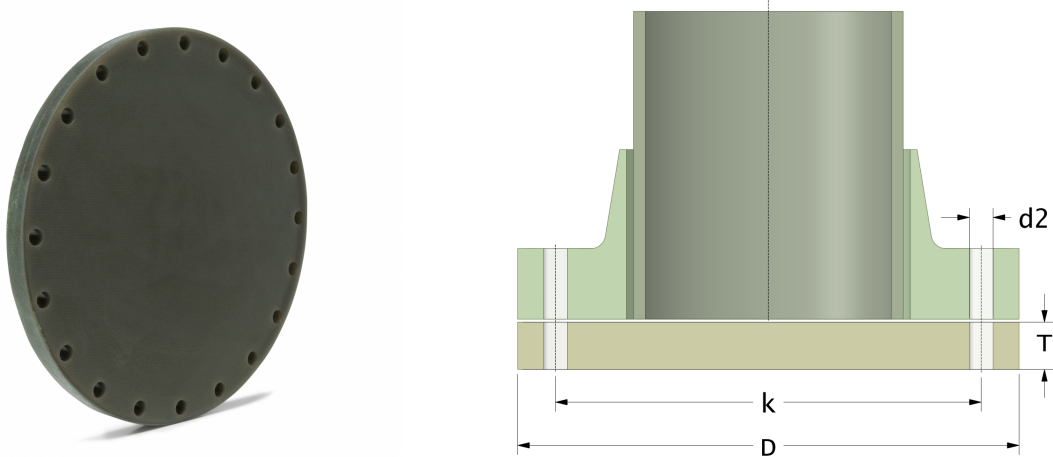

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
51	1600	10	1930	1820	40	56	155	BFE-1600-10/16
52	1600	16	1930	1820	40	56	200	BFE-1600-16/16
53	1800	10	2130	2020	44	56	175	BFE-1800-10/16
54	1800	16	2130	2020	44	56	220	BFE-1800-16/16
55	2000	10	2360	2230	48	62	195	BFE-2000-10/16